


# DF7756-LB80

## POST TOP FIXTURE



Slipfitter Included

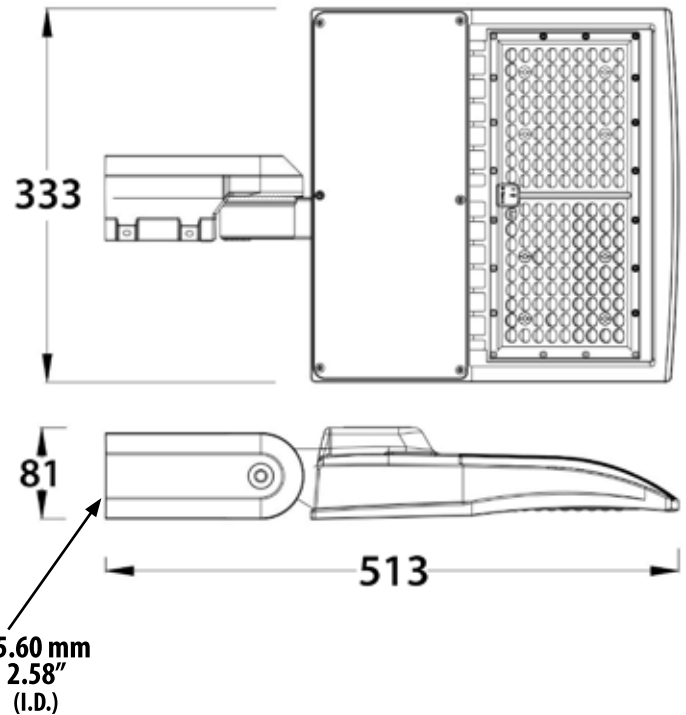


- **Material:** Powder Coated Cast Aluminum
- **Lens:** Clear, Polycarbonate (TYPE 5)
- **Available Finish:** Black, Verde Green
- **Color Temperature:** 4000K
- **Lumens:** 10,000 Lm
- **0 - 10V Dimming Standard**
- **UL Listed**

Model Number	Illuminant Type	Base Type	Wattage (W)	Volatage (V)	Color Temp.	Lamp(s) Included	Lens Type
DF7756-LB80-T3-40K-B	LED	LED Board	80W	100V-277V	40K	Yes	Type 3
DF7756-LB80-T4-40K-B	LED	LED Board	80W	100V-277V	40K	Yes	Type 4
DF7756-LB80-T5-40K-B	LED	LED Board	80W	100V-277V	40K	Yes	Type 5

Overall Dimensions:  
20.19"H x 13.11"W x 3.19"D

Weight: 12 lbs  
Approximate Wire Length: N/A  
Box Dimensions:

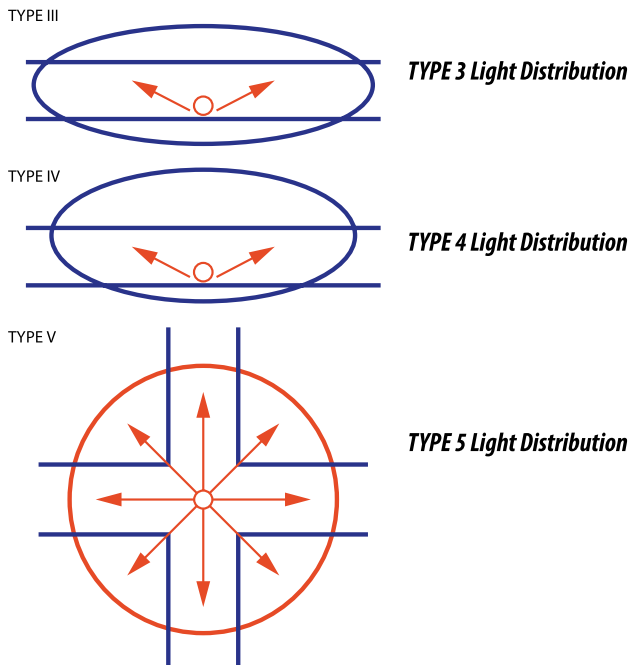

# DF7756-LB80




## Photometric Results


IES Classification: Type V  
Total Rated Lamp Lumens: 10554.3 lm  
Efficiency: 100%  
Upward Ratio: 0%  
Central Intensity: 1181.99 cd  
Pos of Max. Intensity: H45 V78

Longitudinal Classification: Medium  
Measurement Flux: 10554.3 lm  
Downward Ratio: 100%  
Luminaire Efficacy Rating (LER): 129.25  
Max. Intensity: 2942.43 cd

Luminous Intensity Distribution Curve

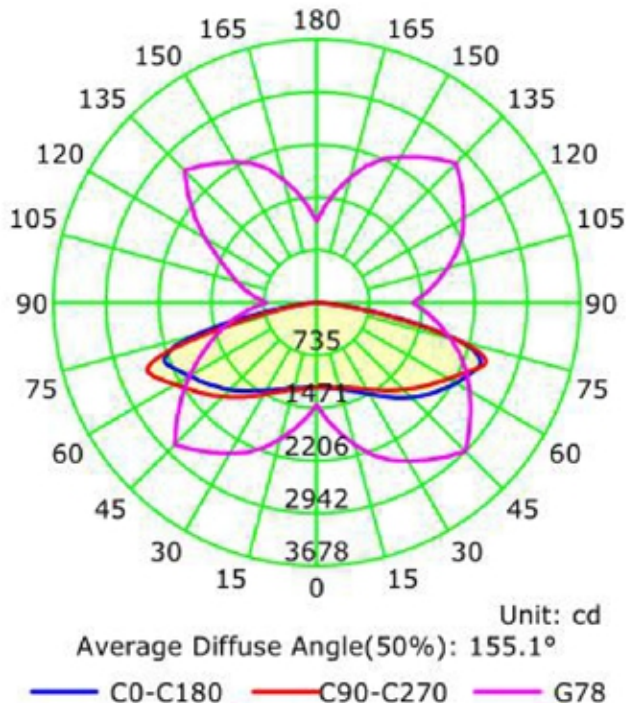

The Average Illuminance Effective Figure

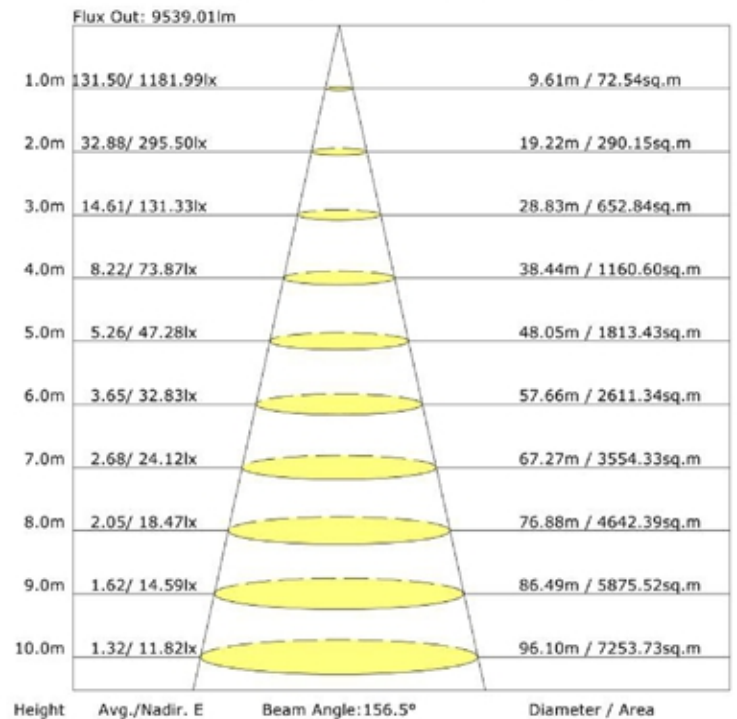

**DABMAR**  
LIGHTING

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . f: 805.604.9050 . www.dabmar.com

4693 19th Street Ct E . Bradenton, FL 34203